

# PAS 150MF 250 FKL38

Diesel - Qmax 111 l/s - Hmax 37 m



## PAS MF - Vacuum prime centrifugal pumps

The pump system consists of a centrifugal pump and a vacuum pump - making automatic priming possible. The machine quickly removes the air from the suction pipe and begins to pump, even at suction heights of several metres. The PAS MF series is also appropriate for pumping liquids with suspended solids because of the semi-open impeller.

## Applications

Both Atlas Copco and Varisco have decades of experience in designing and producing pumps. We have put those years of expertise into providing solutions that work across multiple applications. The PAS MF (medium flow) range is packed with features that not only meet, but exceed the needs of the market. We are focused on an efficient, extremely versatile pump that is suitable for many industries, including construction, general dewatering and emergency applications, such as flood clean up.

## Benefits

### Pump

High efficiency: 77% (B.E.P.)

### Rapid "dry" priming

Up to a height of 7,5 m (24.6 ft)

### High resistance

To abrasive liquids and turbid sandy waters

### Semi-open impeller

Solids handling up to 76 mm (3")

### Diaphragm vacuum pump

Oil free suitable for dry running; no contamination of the environment

### Easy maintenance

Hinged cover for direct access to the impeller (without lifting devices). Link belt quick to replace on the field.

### Mechanical shaft seal in oil bath

It allows the "dry running" operation of the pump

### Wear plate

Cast iron (G11 rubber lined) or stainless steel wear plate, that is easily replaceable

1800 PUMP RENTAL

[nationalpump.com.au](http://nationalpump.com.au) | [sales@nationalpump.com.au](mailto:sales@nationalpump.com.au)




**NPE**  
NATIONAL PUMP & ENERGY

# PAS 150MF 250 FKL38

## Performance curves

Test according to UNI EN ISO 9906 standard - level 2  
Test liquid: clean water, density 1,000 kg/m<sup>3</sup>  
Losses from priming system and check valve not included

Spherical solids handling: D.76 mm (3")  
Max absorbed power: 27,0 kW - 36.2 HP (2.000 rpm)

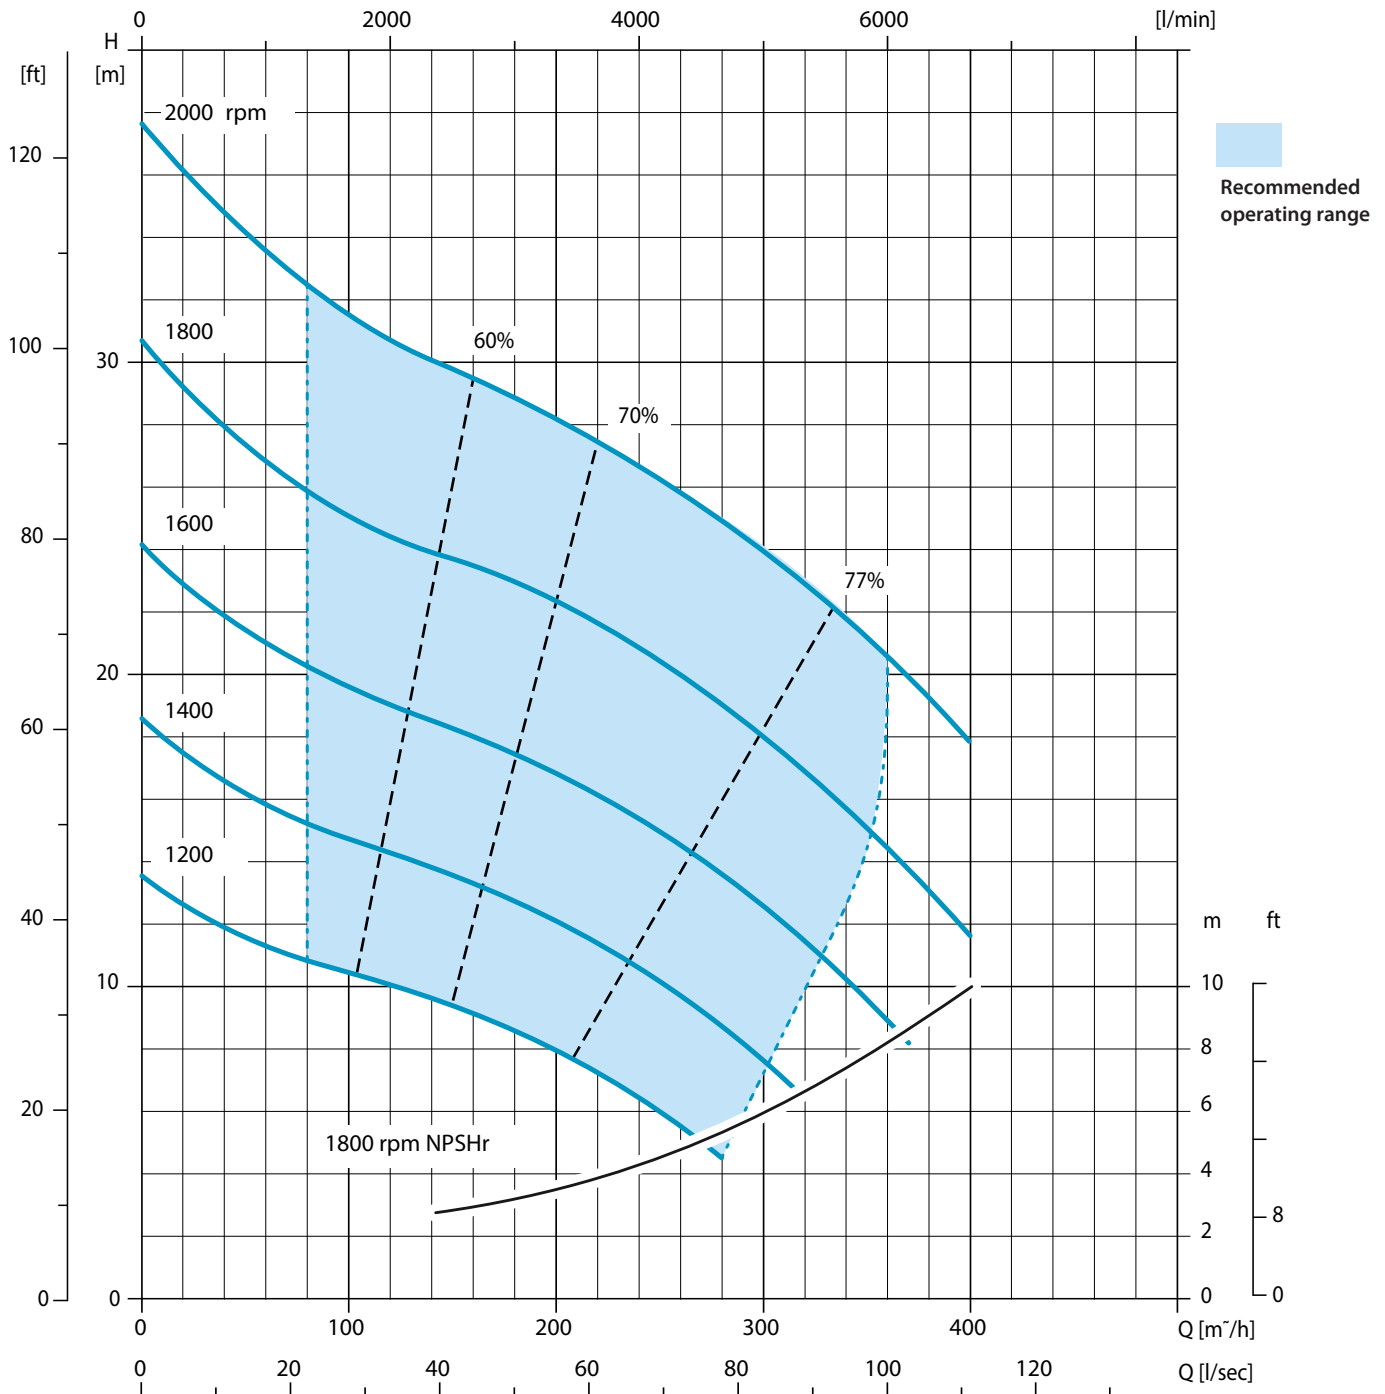

1800 PUMP RENTAL

[nationalpump.com.au](http://nationalpump.com.au) | [sales@nationalpump.com.au](mailto:sales@nationalpump.com.au)



**NPE**  
NATIONAL PUMP & ENERGY

# PAS 150MF 250 FKL38

## Technical data

### Pump

Model		PAS 150MF	
Qmax	111 l/s - 400 m <sup>3</sup> /h		
Hmax	37 m (121 ft)		
Q max eff.	95 l/s - 340 m <sup>3</sup> /h		
Eff. max	77 %		
Suction port	Flanged - 150 TABLE E (AS 2129)		
Delivery port	Flanged - 150 TABLE E (AS 2129)		
Impeller type	Semi-Open, 2 vane		
Solids handling	76 mm (3.0")		
Material	G11	F11	
Casing	EN-GJL-200 cast iron	EN-GJL-200 cast iron	
Impeller	EN-GJS-400 ductile iron	CF3M stainless steel	
Wear plates	EN-GJL-200 rubber lined cast iron	CF3M stainless steel	
Number of plates	2	2	
Shaft	39NiCrMo3 steel	SAF 2205 stainless steel	
Flushing	Yes	Yes	
Mechanical seal	Tungsten carbide / Tungsten carbide	Tungsten carbide / Tungsten carbide	
Elastomers	VITON	VITON	

### Priming system

Vacuum pump		V20
Vacuum pump type	Diaphragm	
Nominal air capacity	50 m <sup>3</sup> /h (29.4 cfm)	
Max vacuum	0,9 bar	
Separator type	Valmatic	
Separator material	EN-GJL-200 cast iron	
Drives	Link belt	

### Engines

Make		Kohler			
Model	KDI 2504M (KL38)				
Type	Diesel direct injection, aspirated				
Displacement	2.482 cm <sup>3</sup> (151 in <sup>3</sup> )				
No. cylinders	4				
Cooling	Liquid with radiator				
Rpm type	Variable				
Standard speed	2.000 rpm				
EU emissions	2002/88/CE Stage IIIA				
US emissions	EPA Tier 3				
Starting	Electric				
Starting voltage	12 V				
Speed [rpm]	1400	1600	1800	2000	
Consumption [l/h]	5,5	6,4	6,7	7,1	
Power [kW]	22,5	26,1	27	28,4	
Power [HP]	30.2	35	36.2	38.1	

### Control panel

Model	PW250 (PW1)
	Manual operation
	Automatic operation: start-stop with floats
	Digital display with 6 languages (IT,EN, FR, DE, ES, PT) with:
	Hour meter, Rev counter,
	Battery voltmeter, Fuel level (%)
	Automatic engine shutdown in case of:
	- low oil pressure
	- water overheating
	- low battery voltage
	(engine failure alarms with LED lights and display message)
	Emergency stop button
	Throttle rod
	(PW1 FleetLink control as option)

1 800 PUMP RENTAL

nationalpump.com.au | sales@nationalpump.com.au



**NPE**  
NATIONAL PUMP & ENERGY

# PAS 150MF 250 FKL38

## Arrangements

### Technical data

Material	S235JR EN 10025-2 carbon steel
Coatings	Polyester powder, average thickness of 80 µm
Color	Yellow and grey Atlas Copco (standard)
Battery	Acid charge Pb-Ca maintenance free 12 V - 100 Ah - 400 A
Tank	320 l (84.5 USG)

### PAS 150MF 250 CNP



Dimensions	1100 x 2280 x 1560 mm
Dry weight (KL38)	1525 kg
Noise level	63-68 dB(A) @10 m

### PAS 150MF 250 SKID



Dimensions	1070 x 2210 x 1750 mm
Dry weight (KL38)	1120 kg
Noise level	75-80 dB(A) @10 m

Specification is subject to change without prior notice. Please check with your local Atlas Copco representative for the latest specifications.

# 1800 PUMP RENTAL

[nationalpump.com.au](http://nationalpump.com.au) | [sales@nationalpump.com.au](mailto:sales@nationalpump.com.au)



# NPE

NATIONAL PUMP & ENERGY