

3,000 LITRE BREAK TANK







National Pump & Energy offers a range of pumps developed and manufactured to meet Australian and European Standards.


Our tank fleet ranges in size from 2,000 L to 60,000L. The NPE 3,000 L break tank is a robust solution for safe and easy water management on mine and construction sites.

The efficient, space-saving design provides optimal storage capacity with multiple lifting points, making it perfect for space-constrained applications.

GENERAL SPECIFICATIONS	
Storage Capacity	3,000 Litre
L x W x H in mm	3,100 x 1,200 x 1,750
Weight	1,000 kg

KEY FEATURES

- Strong, durable, and ideal for storing water in severe environments
- Fully equipped Crane Lifting Lugs and forklift slots facilitate easy lifting and transportation
- The water storage tanks come standard with DN100 inlet, DN100/DN150 discharge, DN100 overflow and drain connections
- Low Maintenance: Smooth walls prevents buildup of solids and allows complete drainage
- Tanks are designed for the static storage only
- Skid mounted unit suitable for various lifting methods - tilt tray, soft sling
- Additional crossovers, isolation, fitting, etc. will be provided as per request
- Water level monitoring with automated pumping system can be provided (Optional)
- Marine Order lifting certifications can be provided(optional)
- Additional filter screen installed on top of the tank for top inlet; microns to be confirmed (Optional)

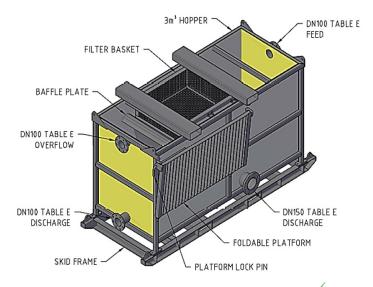





NPE-MAR-PR-0156