



BA180E Diesel Driven

Dewatering and Sewage Pump
Max. 570 m³/hour, Max. 27 mwc



Pump specifications:

Type	BA180E D270
Max. flow	570 m ³ /hour (2510 US GPM)
Max. pressure	27 mwc (89 ft.)
Connections	DN 200 (8")
Solids handling	80 mm (3,15")
Impeller type	Semi-open impeller
Priming system	BBA MP50
Engine	Hatz 4H50TIC
Emission standard .	Stage IIIB / Tier 4 Final
Canopy	M10-25
Weight (net)	2000 kg (4400 lb)
Sound level	Approx. 62 dB(A) at 10m

FEATURES

BA auto prime pump

The BA range of pumps has been designed with a clear focus on reliability, efficiency and durability. Featuring a 100% mechanical priming system, the BA series pumps quickly prime and re-prime, even from dry conditions. The heavy build style of both pump and canopy make the BA range perfect for use in the strenuous contractor market.

World-class performance

The BA range is built to be deployed on the most demanding dewatering and sewage bypassing applications. Using high efficiency pumps and state-of-the-art diesel engines, the pumps offer maximum performance at minimal cost, fully in-sync with the company philosophy of "Lowest cost of ownership".

Sustainability

- High efficiency pumps minimising fuel consumption
- Emissions in accordance with EU Stage & US EPA Tier regulations
- Corrosion free hot dip galvanised canopy
- Corrosion free composite door panels
- 100% Oil-spill free priming system
- Fully bunded unit eliminating fuel/oil spills at all times

Complete package designed & built by BBA Pumps

- Complete in-house design & production
- Over 60 years of experience in the market
- Complete testing facility in-house
- Contemporary & functional design
- Durable & eco-friendly materials
- Custom builds available

After sales service & product support

- Single supplier for parts, spares & accessories
- Dedicated customer help-desk (24h service)
- Dedicated service department in-house
- Global parts distribution network
- Optional global on-site servicing available
- Extensive training options available (technical & commercial), on-site or in-house









NPE
NATIONAL PUMP & ENERGY



BA180E Diesel Driven
Dewatering and Sewage Pump
Max. 570 m³/hour, Max. 27 mwc

PERFORMANCE CURVES (1900 RPM)

Continuous duty according ISO 9906

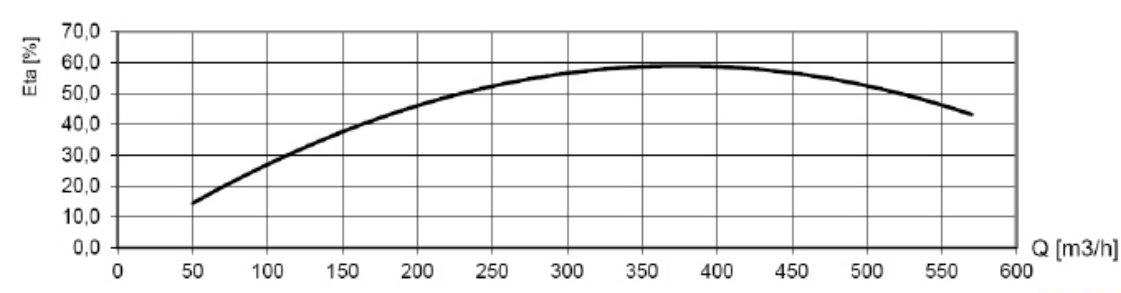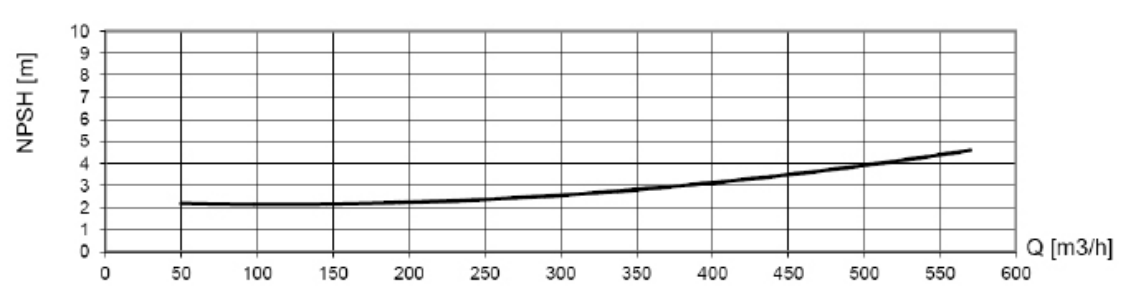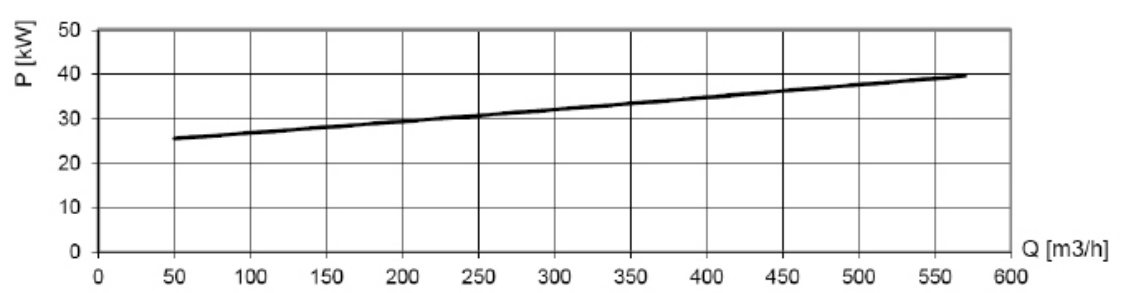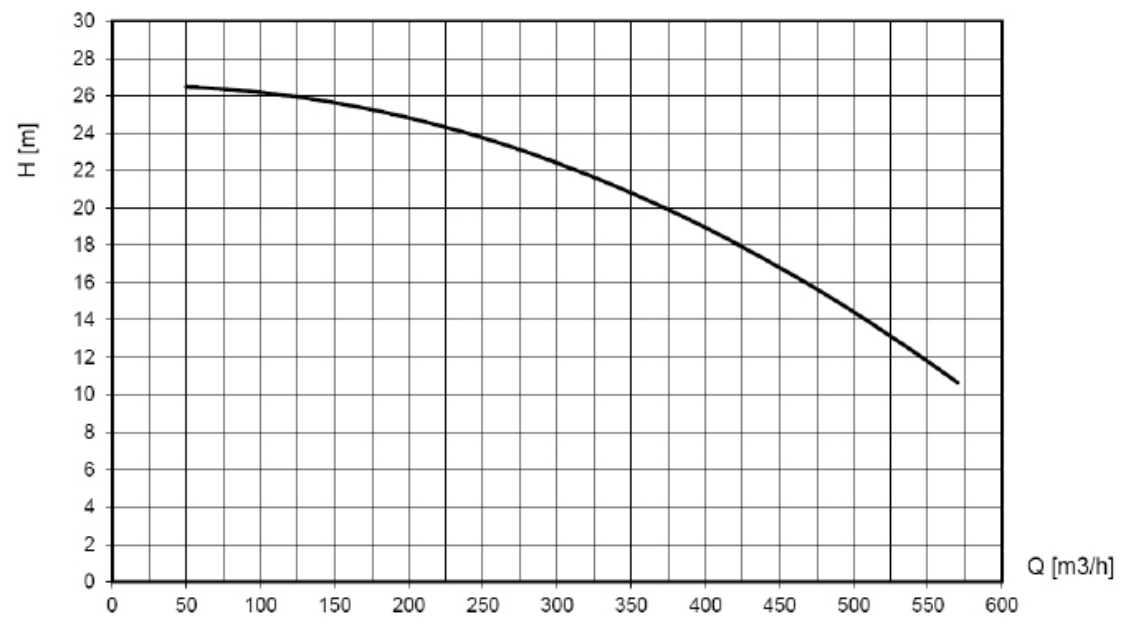



BA180E Diesel Driven

Dewatering and Sewage Pump
Max. 570 m³/hour, Max. 27 mwc

STANDARD TECHNICAL SPECIFICATIONS

BBA auto prime pump

Pump type	BA180E D270
Max. flow	570 m ³ /hour (2510 US GPM)
Max. head	27 mwc (89 feet)
Impeller type	Semi-open impeller
Solids handling	80 mm (3.15 inch)
Pump casing	Cast iron GG20
Impeller	Chrome Moly 42CrM04
Wear plate	Chrome Moly 42CrM04
Pump shaft.....	C45
Shaft seal	Mechanical seal
Seal faces	Tungsten/Sic
Seal rubbers	Viton



BBA priming system

Pump type	BBA MP50 Diaphragm pump
Air handling capacity	50 m ³ /h (30 CFM)
Max. vacuum	8.5 m (29 inHg)
Drive	Toothed belt (continuous drive)
Float box	Aluminium
Non return valve	Cast iron GG25
Check valve disc	Buna-N



Engine

Engine brand	Hatz
Engine type	4H50TIC
Max. power IFN	55.4 kW (75 Hp)
Variable engine speed	1500 - 1900 RPM
Fuel consumption	210 g/kWh
Displacement	1,952 cm ³
Number of cylinders	4
Aftertreatment	EGR, DOC
Exhaust emission EU	Stage IIIB
Exhaust emission US	Tier 4 Final

BBA control panel LC30

- Auto start/stop system
- Two float switches included (10 m cable)
- Switch Manual-O-Auto
- RAMP-UP/DOWN function
- Rpm. control with push buttons
- Warning lights
- 4.3" LCD monitor



The LCD monitor displays additional engine data, e.g. actual engine speed, working hours, battery voltage, fuel consumption and failures in clear text (10 language support)

Fuel system

- Composite fuel tank 300 L.
- Fuel tank cap Ø 100 mm
- Electronic fuel injection system

Electrical system & safety features

- Premium quality battery
- Nominal voltage 12 Volt
- Engine safety features like overload shutdown





NPE
NATIONAL PUMP & ENERGY



BA180E Diesel Driven

Dewatering and Sewage Pump
Max. 570 m³/hour, Max. 27 mwc

CANOPY M10-25



BBA sound attenuating canopy

- Canopy type..... M10-25
- Dimensions L x W x H 2500 x 1050 x 1680 mm
- Dimensions L x W x H 100 x 41.3 x 66.1 inch
- Basic frame Hot dip galvanised
- Doors 4 easy-access doors (lockable)
- Front- and door panels Composite ABS/ASA
- Fuel tank PE net 300 ltr (80 US Gallon)
- Fuel tank autonomy 30 hours (at 1900 rpm BEP)
- Fuel tank cap 100 mm (4 inch)
- Forklift pockets..... Fitted with 2 forklift pockets
- Lifting point Fitted with 2 lifting points
- Oil drain pump Please consult “auxiliary items” in overleaf
- Connections Please consult “auxiliary items” in overleaf
- Exhaust system Fully integrated in canopy
- Additional Fitted with oil-water separator
- Documentation box BBA user manual and warranty book



BBA E-lift® system

The M10-23 canopy has been fitted with the BBA E-lift® system. By removing the roof panel, the pump and diesel engine as a whole can be removed from the canopy effortlessly allowing easy preventative maintenance on the pump and diesel engine. In addition, as the canopy is not fitted with padding or insulation materials, it can be cleaned quickly using a pressure washer.

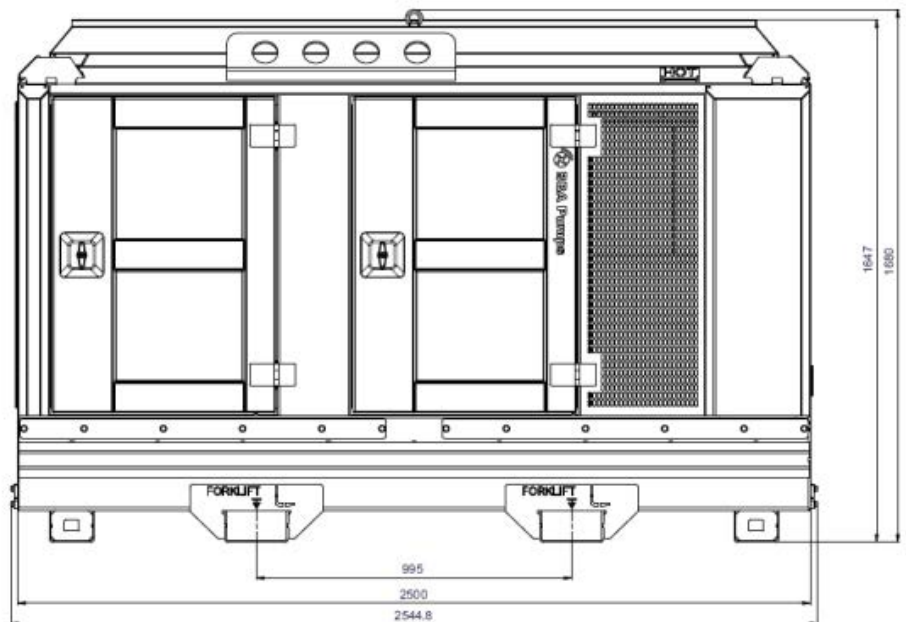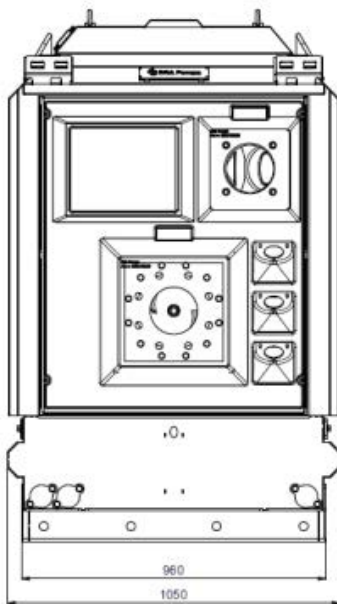

Actual dimensions (in mm) may vary depending on selected quick couplings.



EXCLUSIVE DEALER



BA180E Diesel Driven

Dewatering and Sewage Pump
Max. 570 m³/hour, Max. 27 mwc




Semi-open impeller
Corrosion and abrasion resistant Chrome Moly (42CrM04) alloy.




Fuel tank
Fully bunded, corrosion-free, 300 litre, high-density polyethylene (HDPE) fuel tank, located in base of canopy.



Easy inspection
Oil glasses, drain valves and fill plugs are all easily accessible.



Speedy servicing
By removing the roof panel, the pump and diesel engine as a whole can be removed from the canopy effortlessly allowing easy preventative maintenance on the pump and diesel engine.



Large inspection covers
Easy access to float box, impeller and non-return valve.



Safety
Extremely durable and lockable T-locks offering perfect grip.



4 Year limited warranty
The BBA limited warranty covers years or operating hours whichever occurs first. For more details please consult the BBA warranty book.



User Manual
Extensive user manual with important information concerning the pump unit, pump installation and safety warnings. Available in several languages.

Pictures used are for illustration purposes only.





NPE
NATIONAL PUMP & ENERGY




BA180E Diesel Driven

Dewatering and Sewage Pump
Max. 570 m³/hour, Max. 27 mwc

AUXILIARY ITEMS


M10-23 Kit

93050002	M10-23 Kit	
	- KO Oil drain pump	
	- External fuel tank connections	
	- Battery isolator switch	


Discharge connections

Art.nr.		Ø inch	Ø mm	Connection	
1516604209	30° flange DIN	8	200	Flange	
05080899	30° flange ANSI	8	200	Flange	
05080813	30° female (cup)	8	200	System B	
05080909	30° male (ball/lever)	8	200	System B	
05080895	30° male (ball/ring)	8	200	System IT	
05080898	30° female (cup/lever)	8	200	System IT	


Suction connections

Art.nr.		Ø inch	Ø mm	Connection	
17160295	0° flange K295 x K350	8-10	200-250	DIN Flange	
05080911	0° male (ball/lever)	8	200	System B	
05080914	0° female (cup)	8	200	System B	
03811500	0° male (ball/ring)	8	200	System IT	
03811510	0° female (cup/lever)	8	200	System IT	
03811505	0° male (ball/ring)	10	250	System IT	
03811506	0° female (cup/lever)	10	250	System IT	

Suction hose with strainer L=5 metre

Art.nr.	Ø mm	Ø inch	Connection	
07047042	8	200	System IT female (cup/lever)	
07047057	8	200	Flange K295	
07047062	10	250	Flange K350	

Suction hose with strainer L=6 metre

Art.nr.	Ø mm	Ø inch	Connection	
07047043	8	200	System IT female (cup/lever)	
07047058	8	200	Flange K295	
07047063	10	250	Flange K350	

Recommended suction pipe ID vs flow rates by pipe dimension (maximum velocity = 4 m/sec)

M ³ /H	US gallons	FLOW (L/sec)	4" 100	5" 125	6" 150	8" 200	10" 250	12" 300
324	1426	90	11.46	7.33	5.09	2.86	1.83	1.27
360	1585	100	12.73	8.15	5.66	3.18	2.04	1.41
403.2	1775	112	14.26	9.13	6.34	3.57	2.28	1.58
432	1902	120	15.28	9.78	6.79	3.82	2.44	1.70
468	2060	130	16.55	10.59	7.36	4.14	2.65	1.84
504	2219	140	17.83	11.41	7.92	4.46	2.85	1.98
540	2337	150	19.10	12.22	8.49	4.77	3.06	2.12
576	2536	160	20.37	13.04	9.05	5.09	3.26	2.26
612	2694	170	21.65	13.85	9.62	5.41	3.46	2.41

