

VAR 6-250 FKL38 - 4 CYL SKID02

Diesel - 100 l/s - Hmax 36,0 m



Indicative picture of the product

VAR - Self-priming centrifugal pumps

These self-priming centrifugal pumps are for applications where the main feature is the difficulty in priming. Even with suction heights of several meters the machine quickly evacuates the air from the suction pipe and starts pumping. Additionally, thanks to the semi-open impeller, the VAR range is also suitable for pumping liquids with solids in suspension.

Applications

Both Atlas Copco and Varisco have decades of experience in designing and producing pumps. We have put those years of expertise into providing a solutions portfolio that works across multiple applications. The VAR range is packed with features that not only meet, but exceed the needs of the market. We are focused on an efficient, extremely versatile pump that is suitable for many industries, including construction, general dewatering and emergency applications, such as flood clean up.

Benefits

Rapid "dry" priming

Without foot valve up to a height of 7.5 m (24.5 ft)

High resistance

To abrasive liquids and turbid sandy waters

Semi-open impeller

Solids handling up to 76 mm (3")

Easy maintenance

Removable front cover for direct access to the impeller

Wear plate

Cast iron (G11 rubber lined) or stainless steel wear plates, that are easily replaceable

1 800 PUMP RENTAL

nationalpump.com.au | sales@nationalpump.com.au



NPE
NATIONAL PUMP & ENERGY

VAR 6-250 FKL38 SKID02

Performance curves


Test according to UNI EN ISO 9906 standard - level 2

Test liquid: clean water, density 1,000 kg/m³

Losses from check valve not included

Spherical solids handling: D.76 mm (3")

Max absorbed power: 25,0 kW - 33.5 HP (2.000 rpm)

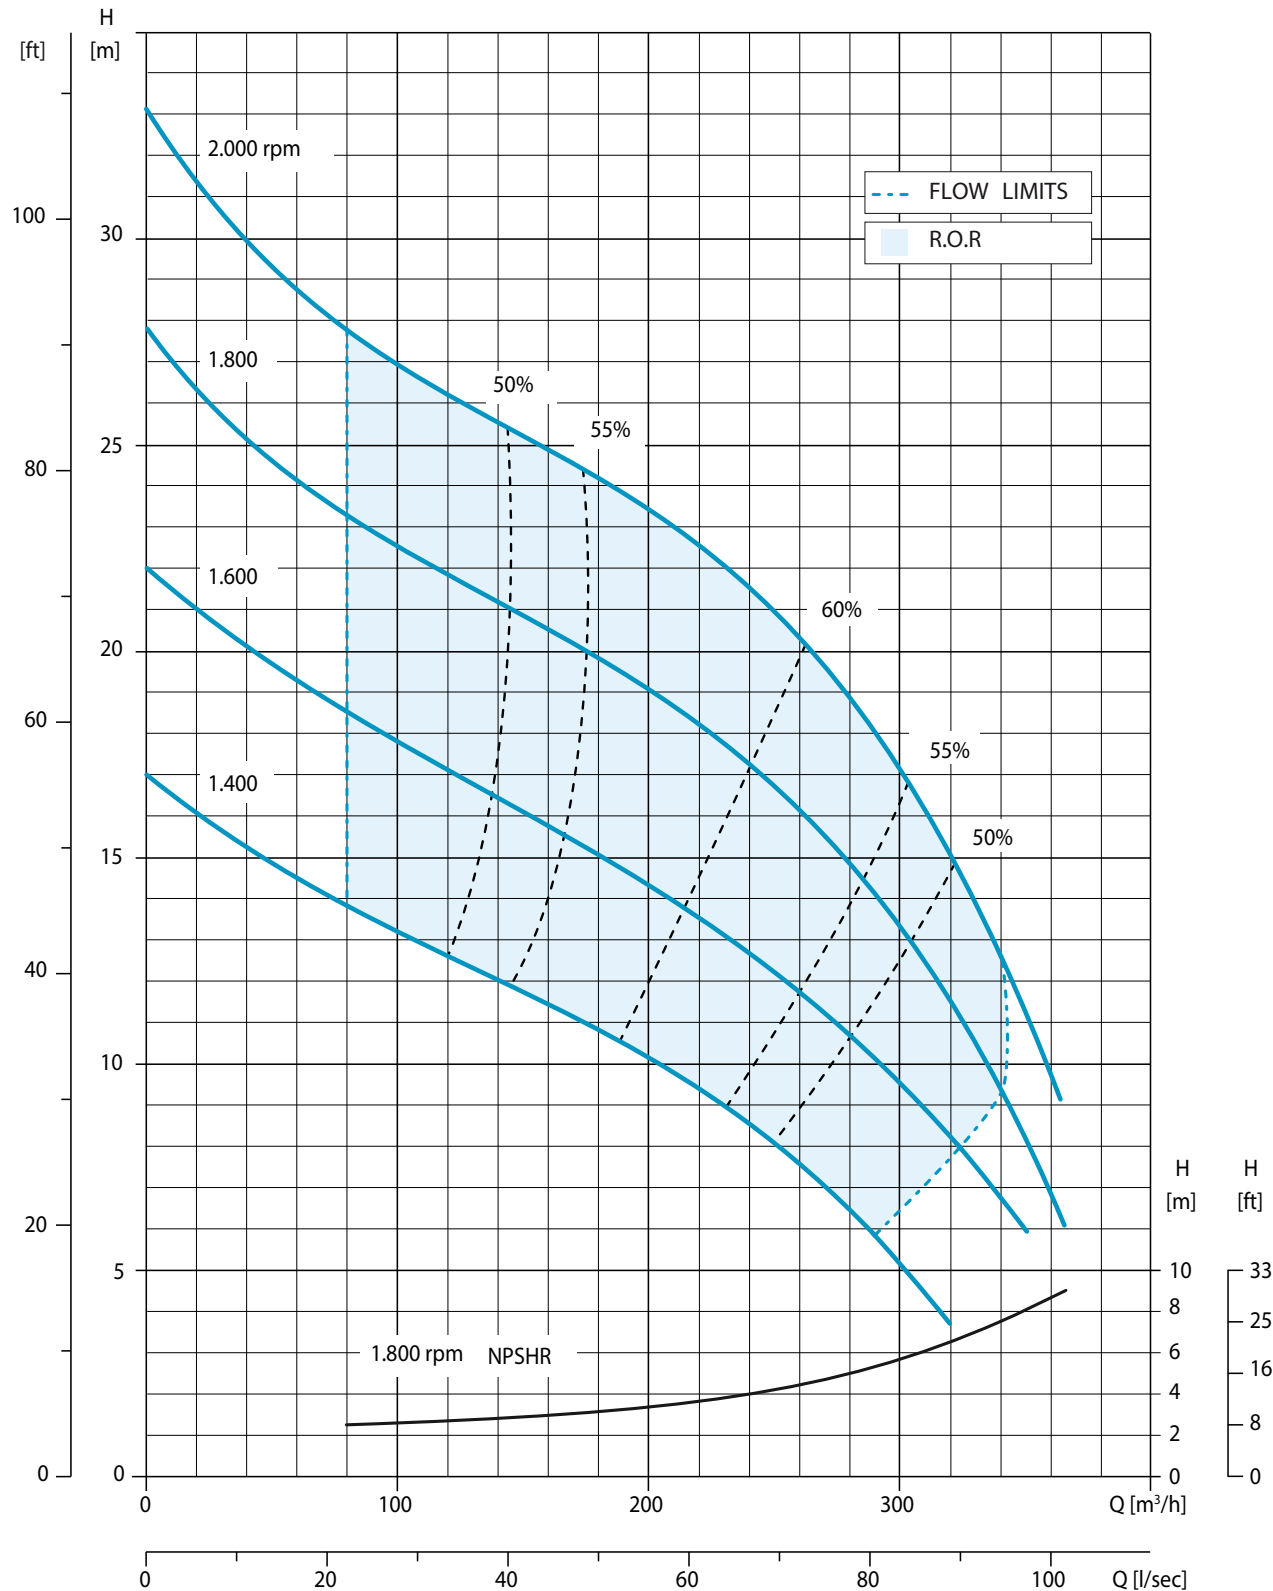

1800 PUMP RENTAL

nationalpump.com.au | sales@nationalpump.com.au



NPE
NATIONAL PUMP & ENERGY

VAR 6-250 FKL38 SKID02

Technical data

Pump

Model	VAR 6-250	
Qmax	100 l/s - 360 m ³ /h - 6.000 l/min (1,590 USgpm)	
Hmax	36,0 m (118 ft)	
Q max eff.	74 l/s - 265 m ³ /h - 4.420 l/min (1,170 USgpm)	
Eff. max	60 %	
Suction port	Flanged - 150 TABLE E (AS 2129)	
Delivery port	Flanged - 150 TABLE E (AS 2129)	
Impeller type	Semi-Open, 2 vane	
Solids handling	76 mm (3.0 ")	
Material	G11	F11
Casing	EN-GJL-200 cast iron	EN-GJL-200 cast iron
Impeller	EN-GJS-400 ductile iron	CF8M stainless steel
Wear plates	EN-GJL-200 rubber lined cast iron	CF8M stainless steel
Number of plates	2	2
Shaft	39NiCrMo3 steel	SAF 2205 stainless steel
Flushing	Yes	Yes
Mechanical seal	Silicon carbide / Silicon carbide	Silicon carbide / Silicon carbide
Elastomers	NBR	VITON

Engine

Make	Kohler			
Model	KDI 2504M (KL19)			
Type	Diesel direct injection, aspirated			
Displacement	2.482 cm ³ (151 in ³)			
No. cylinders	4			
Cooling	Liquid with radiator			
Rpm type	Variable			
Standard speed	2.000 rpm			
US emissions	EPA Tier 3			
Starting	Electric			
Starting voltage	12 V			
Speed [rpm]	1400	1600	1800	2000
Consumption [l/h]	5,5	6,4	6,7	7,1
Power [kW]	22,5	26,1	27	28,4
Power [HP]	30.2	35	36.2	38.1

Control panel

Model	PW250 (PW1)
	Manual operation
	Automatic operation: start-stop with floats
	Digital display with 6 languages (IT,EN, FR, DE, ES, PT) with:
	Hour meter, Rev counter,
	Battery voltmeter, Fuel level (%)
	Automatic engine shutdown in case of:
	- low oil pressure
	- water overheating
	- low battery voltage
	(engine failure alarms with LED lights and display message)
	Emergency stop button
	Throttle rod
	(PW1 FleetLink control as option)

1 800 PUMP RENTAL

nationalpump.com.au | sales@nationalpump.com.au



NPE
NATIONAL PUMP & ENERGY

VAR 6-250 FKL38 SKID02

Arrangement

Technical data

Material	S275JR EN 10025-2 carbon steel
Coatings	Epoxy powder, average thickness of 80 µm
Color	Yellow and grey Atlas Copco (standard)
Features	Painted steel base. Hot dip galvanised steel skid and lifting beam. Lockable battery box. Fuel level indicator.
Battery	Acid charge Pb-Ca maintenance free 12 V - 100 Ah - 400 A
Tank	300 l (79.3 USG)
Locking keys	Fuel cap

SKID02 VAR 6-250



Dimensions	1070 x 2220 x 1670 mm 42 x 87 x 66 "
H suction port	0,96 m (3.1 ft)
Dry weight	925 kg (2,040 lb)

1 800 PUMP RENTAL

nationalpump.com.au | sales@nationalpump.com.au



NPE
NATIONAL PUMP & ENERGY